


SYMBOL	TYPE	PRODUCT NAME	CONTACT NAME / NUMBER
		FLUORESCENT (Profile Louver Type)	

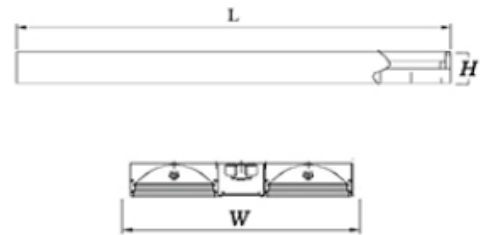

HOUSING	WIRING CABLE
---------	--------------

MADE FROM HIGH GRADE COLD ROLLED STEEL SHEET.  
SIX-STAGES ZINC-PHOSPHATE PRE-TREATMENT FOR RUST RESISTANT , FINISHED WITH WHITE POLYESTER POWDER BY ELECTROSTATIC METHOD TWO STAGES AND BAKED ENAMEL .  
THICKNESS  0.6 mm ,  0.8 mm

THW 1x1.0 SQ.MM. 70 °C  
WIRING CABLE (STANDARD)

LOUVER	DIFFUSER
--------	----------

MADE FROM 99.85% PURITY ANODIZED ALUMINIUM , PARABOLIC LOUVER FOR LONGITUDINAL AND CHRISTMAS TREE PROFILES FOR TRANSVERSAL TO ANTI-GLARE .

NONE

REFLECTOR	LAMP AND HOLDER
-----------	-----------------

MADE FROM 99.85% PURITY ANODIZED ALUMINIUM WITH MIRROR FINISHED  
 87% AND  95% TOTAL REFLECTANCE

G13 ROTARY LOCK TYPE LAMP HOLDER

STANDARD	INSTALLATION
----------	--------------

TIS.902 เล่ม 2 (1) - 2557 WITH CLASS I AND F MARK  
TIS.1955-2551

SURFACE OR SUSPENDED MOUNTED

MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
DLL13S-24L	2x36W	FL	595	1222	85	