


SYMBOL	TYPE	PRODUCT NAME	CONTACT NAME / NUMBER
		FLUORESCENT (Insect Proof)	

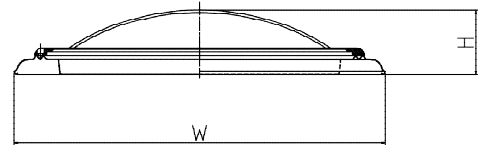

HOUSING			WIRING CABLE			
<p>HIGH GRADE DIE-FORM STEEL SHEET.</p> <p>SIX-STAGES ZINC-PHOSPHATE PRE-TREATMENT FOR RUST RESISTANT , FINISHED WITH WHITE POLTESTER POWDER BY ELECTROSTATIC METHOD TWO STAGES AND BAKED ENAMEL .</p> <p>THICKNESS <input type="checkbox"/> 0.6 mm , <input type="checkbox"/> 0.8 mm</p>			<p>THW 1x1.0 SQ.MM. 70 °C</p> <p>WIRING CABLE (STANDARD)</p>			
DIFFUSER			LOUVER			
<p>DIE-FORM IN CRUVE SHAPE WITH LOCKING RING SYSTEM AND EXCELLENT WEATHERPROOF RUBBER GASKET, PREVENT ANY INSECTS TO ACCUMULATE IN LUMINAIRE (PATENT B.E. 2522)</p> <p>MADE FROM <input type="checkbox"/> PRISMATIC <input type="checkbox"/> ORANGE-PEEL <input type="checkbox"/> OPAL <input type="checkbox"/> TRANSPARENT</p>			<p>NONE</p>			
REFLECTOR			LAMP AND HOLDER			
<p>NONE</p>			<p>G10q TYPE LAMP HOLDER</p>			
STANDARD			INSTALLATION			
<p>TIS.902 เล่ม 2 (1) - 2557 WITH CLASS I AND F MARK</p> <p>TIS.1955-2551</p>			<p>SURFACE MOUNTED</p>			
MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
DLCL-1102 (G10q)	32W	G10q	432	432	90	